

Digital Temperature Sensor with I²C Interface and ALT

1 Features

- Temperature range: -55°C to +125°C
- Accuracy: ±0.6°C(-25°C to +55°C)
- Resolution: 0.0625°C (12Bits)
- Supply voltage: 1.4V to 5.5V
- Low quiescent current:
 - Normal operation: 15µA@12Hz
 - Shutdown mode: 0.3µA
- Digital output: I2C, SMBus
- Alternative to GD30TS076C

2 Applications

- Temperature Monitoring
- Thermostat Controls
- Device Thermal Protection
- General Temperature Measurement

3 Description

The GD30TS076C is a fully integrated digital temperature sensor with a 12bit ADC that can operate at a 1.8V supply, and is pin and register compatible with the x75.

The GD30TS076C features SMBus and I2C interface, and allows up to eight devices on the same bus. The programmable temperature limits and the ALT pin allow the sensor to operate as a stand-alone thermostat.

The GD30TS076C has been precisely calibrated at the factory, and the user does not need any additional compensation processing for the temperature output.

Device Information¹

PART NUMBER	PACKAGE	BODY SIZE (NOM)
GD30TS076C	SOP-8	4.90mm × 3.90mm
	MSOP-8	3.00mm × 3.00mm
	DFN-8	3.00mm × 3.00mm

1. For packaging details, see [Package Information](#) section.

Internal Schematic Diagram


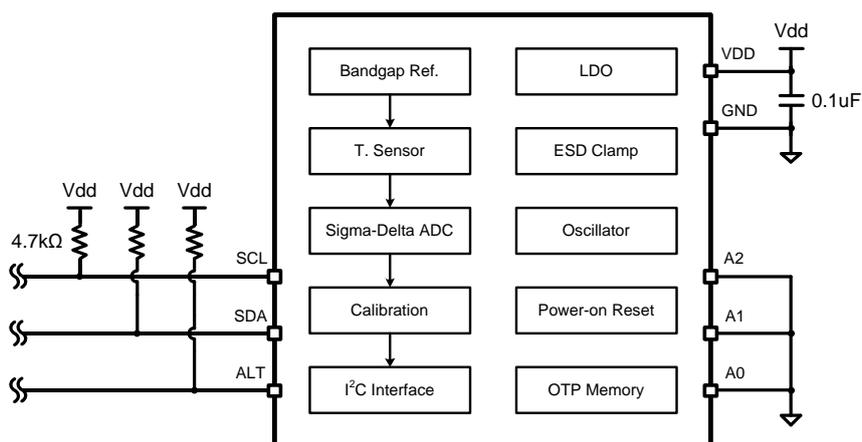


Table of Contents

1	Features	1
2	Applications	1
3	Description.....	1
	Table of Contents	2
4	Device Overview.....	3
	4.1 Pinout and Pin Assignment	3
	4.2 Pin Description	3
5	Parameter Information	4
	5.1 Absolute Maximum Ratings.....	4
	5.2 Recommended Operation Conditions	4
	5.3 Electrical Sensitivity	4
	5.4 Electrical Characteristics	4
	5.5 Typical Characteristics	6
6	Functional Description	7
	6.1 Temperature Output	7
	6.2 Register Map	8
	6.3 Functional Modes	10
	6.4 Over-Temperature Alarm	10
	6.5 Serial Interface	11
7	Application Information	15
	7.1 Remote Temperature Probe Selection	15
8	Layout Guidelines and Example	16
9	Package Information	17
	9.1 Outline Dimensions	17
10	Ordering Information	20
11	Revision History	21

4 Device Overview

4.1 Pinout and Pin Assignment

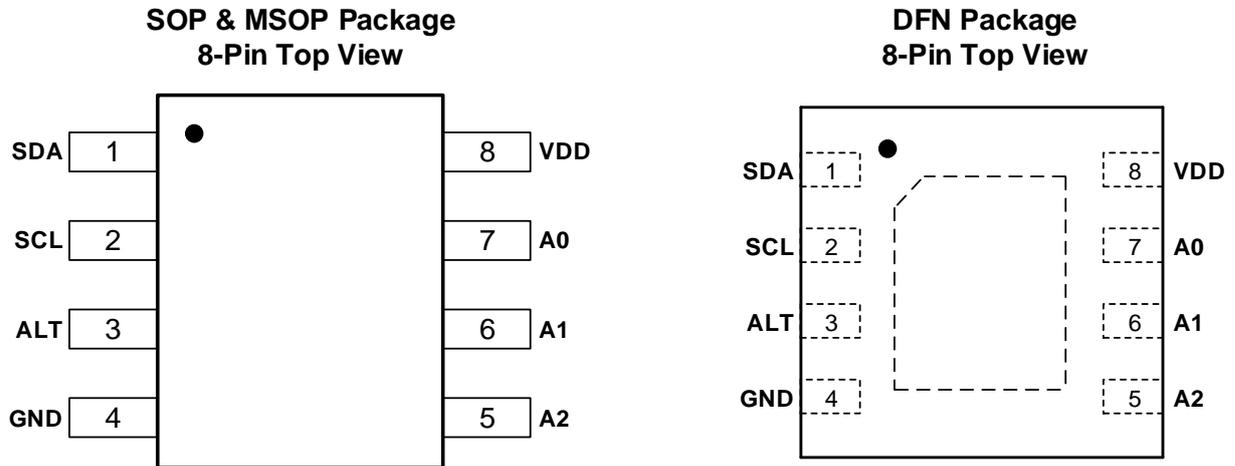

4.2 Pin Description

PINS		PIN TYPE ¹	FUNCTION
NAME	MSOP8/SOP8/DFN8		
SDA	1	IO	Serial data. Open-drain output; requires a pull-up resistor.
SCL	2	O	Serial clock. Open-drain output; requires a pull-up resistor.
ALT	3	O	Over-temperature alert. Open-drain output; requires a pull-up resistor.
GND	4	G	Ground.
A2	5	I	Address select. Connect to GND or VDD.
A1	6	I	Address select. Connect to GND or VDD.
A0	7	I	Address select. Connect to GND or VDD.
VDD	8	P	Supply voltage, 1.4V to 5.5V.

1. I = input, O = Output, IO=input and output, P = power, G = Ground,.

5 Parameter Information

5.1 Absolute Maximum Ratings

Exceeding the operating temperature range (unless otherwise noted)¹

SYMBOL	PARAMETER	MIN	MAX	UNIT
VDD	Power supply	-0.3	6	V
V _{IO}	Voltage at SCL, SDA, ALT, A2, A1 and A0	-0.3	6	V
T _J	Junction temperature	-55	150	°C
T _{stg}	Storage temperature	-60	150	°C

1. Over operating free-air temperature range (unless otherwise noted). Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device.

5.2 Recommended Operation Conditions

SYMBOL ¹	PARAMETER	MIN	TYP	MAX	UNIT
VDD	Supply voltage	1.4	3.3	5.5	V
T _A	Operating Temperature Range	-55		125	°C

1. Unless otherwise stated, over operating free-air temperature range.

5.3 Electrical Sensitivity

SYMBOL	CONDITIONS	VALUE	UNIT
V _{ESD(HBM)}	Human-body model (HBM), ANSI/ESDA/JEDEC JS-001-2017 ¹	±8000	V
V _{ESD(CDM)}	Charge-device model (CDM), ANSI/ESDA/JEDEC JS-002-2022 ²	±1400	V

1. JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
2. JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

5.4 Electrical Characteristics

At T_A = -40°C to +125°C and VDD = 1.4 V to 5.5 V, unless otherwise noted. Typical values at T_A = 25°C and VDD = 1.8V.


SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
VDD	Power Supply Voltage		1.4	3.3	5.5	V
I _Q	Quiescent Current	Serial bus inactive		15	30	μA
I _{SD}	Shutdown Current	Serial bus inactive		0.3	6	μA
t _{CON}	Conversion Time			26	35	ms
	Update Rate			80		ms
T _{ACC}	Temperature Accuracy	-25°C to +55°C		±0.4	±0.6	°C
		-55°C to +125°C		±0.6	±1.0	°C
	Supply Voltage Sensitivity	-40°C to +125°C			±0.1	°C/V
	ADC Resolution			0.0625		°C
				12		Bits

Electrical Characteristics(continued)

At $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ and $V_{DD} = 1.4\text{ V}$ to 5.5 V , unless otherwise noted. Typical values at $T_A = 25^{\circ}\text{C}$ and $V_{DD} = 1.8\text{V}$.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
	Repeatability			±1		LSB
f_{BUS}	Bus Frequency	Fast mode	0.001		0.4	MHz
$t_{\text{TIME_OUT}}$	Bus Timeout Time		18	20	26	ms
V_{IH}	Input Logic High Level		$0.7 \times V_{\text{DD}}$		V_{DD}	V
V_{IL}	Input Logic Low Level		-0.3		$0.3 \times V_{\text{DD}}$	V
V_{OL}	Output Logic Low Level	$V_{\text{DD}} \geq 2\text{V}, I_{\text{OL}} = 3\text{mA}$			0.4	V
		$V_{\text{DD}} < 2\text{V}, I_{\text{OL}} = 3\text{mA}$			$0.2 \times V_{\text{DD}}$	

5.5 Typical Characteristics

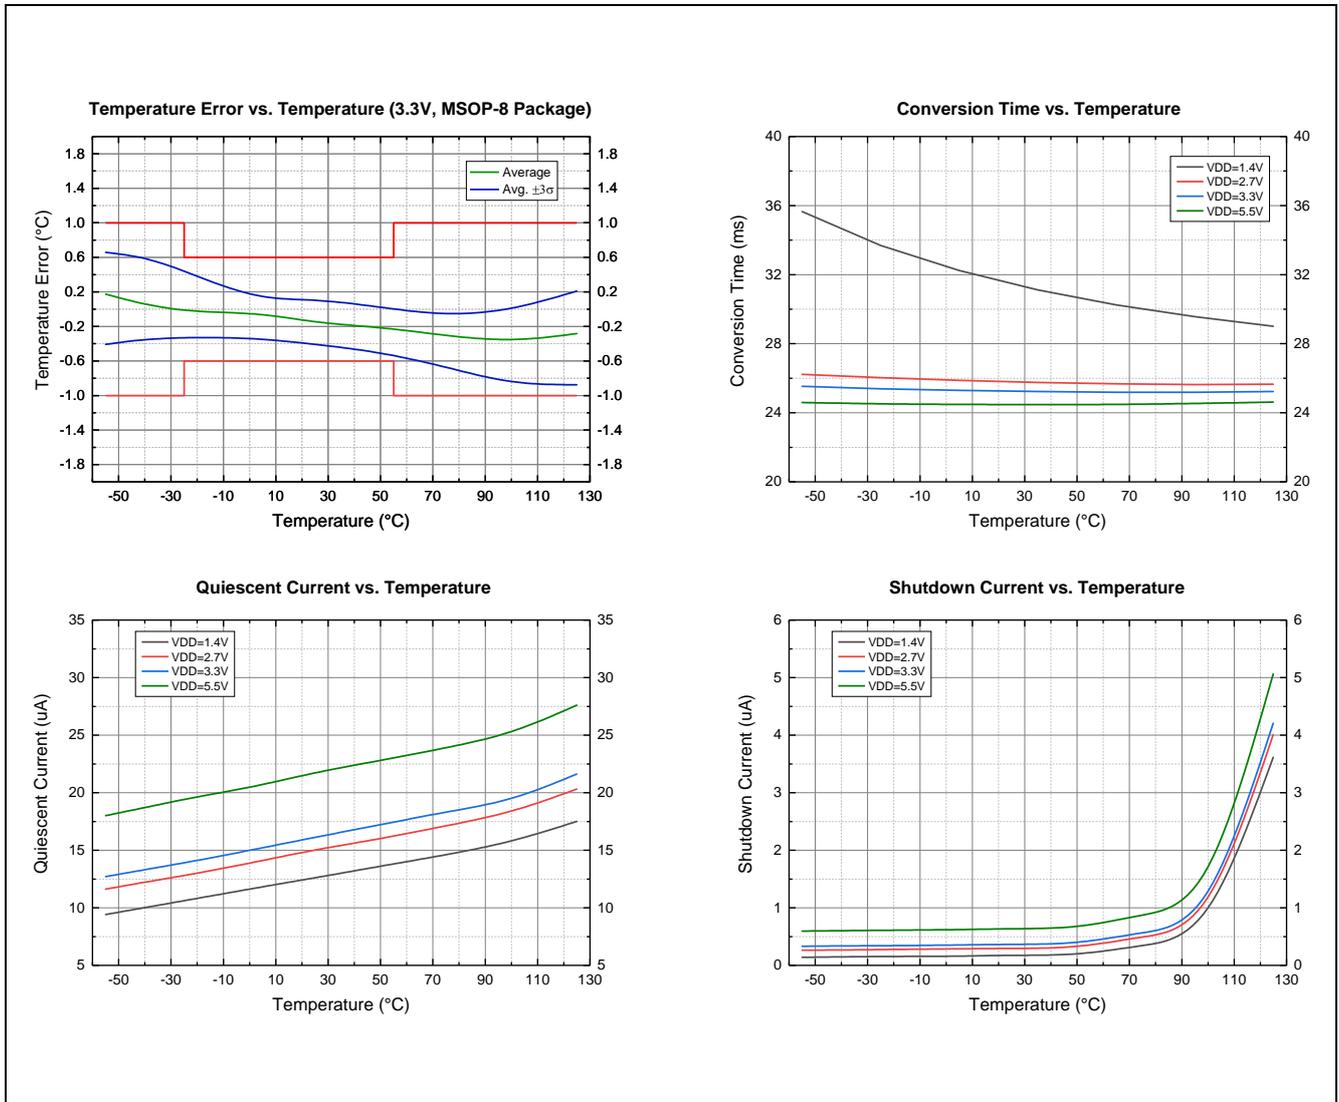

6 Functional Description

6.1 Temperature Output

The 12bit digital output of each temperature measurement is saved in a read-only temperature register, where 1 LSB = 0.0625°C and negative numbers are represented in binary complement form. When powered on or reset, the GD30TS076C's temperature register is initialized to 0x0000 until the next temperature conversion is complete. Unused bits in the temperature register are always read as 0. A specific example is shown in [Table 1](#).

Getting the temperature output requires reading two bytes, where byte 1 is a high significant byte (MSB), followed by byte 2 is a low significant byte (LSB). The left-justified high 12 bits are used to indicate temperature. If a temperature resolution of less than 1 °C is not required, the user can choose not to read bytes 2.

Table 1. Temperature Data Format

TEMPERATURE (°C)	BINARY	HEX
128	0111 1111 1111 0000	0x7FF0
127.9375	0111 1111 1111 0000	0x7FF0
100	0110 0100 0000 0000	0x6400
80	0101 0000 0000 0000	0x5000
75	0100 1011 0000 0000	0x4B00
50	0011 0010 0000 0000	0x3200
25	0001 1001 0000 0000	0x1900
0.25	0000 0000 0100 0000	0x0040
0	0000 0000 0000 0000	0x0000
-0.25	1111 1111 1100 0000	0xFFC0
-25	1110 0111 0000 0000	0xE700
-55	1100 1001 0000 0000	0xC900

1. [Table 1](#) does not provide data formats for all temperatures.

6.2 Register Map

The GD30TS076C internal register stack consists of four 16-bit registers, and the mapping is shown in [Table 2](#).

Table 2. Pointer Address

POINTER	REGISTER	TYPE	RESET VALUE
0x00	Temperature	R	0x0000
0x01	Configuration	R/W	0x00C0
0x02	Low Limit	R/W	0x4B00
0x03	High Limit	R/W	0x5000
0x04	One-Shot	-	-

1. R/W=Read/Write; R=Read only; W=Write only; -n=value after reset.

Table 3. Temperature Register (pointer=0h)

BIT	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Binary	T11	T10	T9	T8	T7	T6	T5	T4	T3	T2	T1	T0	-	-	-	-
Default	sign	64	32	16	8	4	2	1	2 ⁻¹	2 ⁻²	2 ⁻³	2 ⁻⁴	-	-	-	-
Type	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R

1. R/W=Read/Write; R=Read only; W=Write only; - =value after reset.

Table 4. Temperature Low Limit Register(T_{LOW})

BIT	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Binary	L11	L10	L9	L8	L7	L6	L5	L4	L3	L2	L1	L0	0	0	0	0	
Default	0	1	0	0	1	0	1	1	0	0	0	0	-	-	-	-	
Type	R/W	R	R	R	R												

1. LEGEND: R/W=Read/Write; R=Read only; W=Write only; - =value after reset

Table 5. Temperature High Limit Register(T_{HIGH})

BIT	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Binary	H11	H10	H9	H8	H7	H6	H5	H4	H3	H2	H1	H0	0	0	0	0	
Default	0	1	0	1	0	0	0	0	0	0	0	0	-	-	-	-	
Type	R/W	R	R	R	R												

1. LEGEND: R/W=Read/Write; R=Read only; W=Write only; - =value after reset

Table 6. Configuration Register

BIT	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Binary	-	-	OS	FQ1	FQ0	POL	TM	SD	-	-	-	-	-	-	-	-
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Type	R	R	R/W	R/W	R/W	R/W	R/W	R/W	R	R	R	R	R	R	R	R

1. LEGEND: R/W=Read/Write; R=Read only; W=Write only; - =value after reset

Table 7. Configuration Register Description

Field	Description
-	Reserved bits Write 0 to these bits on configuration register update.
OS	One-Shot control SD=0 & OS=0 : continuous mode (default) SD=0 & OS=1 : one-shot mode; writing any value to the one-shot register initiates a conversion. SD=1 & OS=x : shutdown mode; the status of the OS bit has no effect.
FQ	Fault queue to trigger the ALT pin FQ=0h : 1 fault (default) FQ=1h : 2 fault FQ=2h : 4 fault FQ=3h : 6 fault
POL	ALT polarity control POL=0 : ALT is active low (default) POL=1 : ALT is active high
TM	ALT thermostat mode control TM=0 : ALT is in comparator mode (default) TM=1 : ALT is in interrupt mode
SD	Shutdown control SD=0 : Device is in continuous mode (default) SD=1 : Device is in shutdown mode

6.3 Functional Modes

6.3.1 Continuous Mode

The default mode of the GD30TS076C is continuous conversion, where the ADC performs continuous temperature conversions and stores each result to the Temperature register, overwriting the result from the previous conversion. The typical conversion rate of GD30TS076C is 12Hz, with 80ms between the start of each consecutive conversion. The GD30TS076C has a typical conversion time of 26ms. To achieve its conversion rates, the GD30TS076C makes a conversion, and then powers down and waits for a delay 54ms.

After power-up, the GD30TS076C immediately starts a conversion, as shown in [Figure 1](#). The first result is available after 26ms (typical). The active quiescent current during conversion is 40μA (typical at +25°C). The quiescent current during delay is 3μA (typical at +25°C).

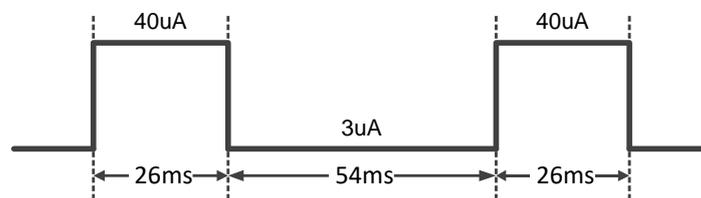


Figure 1. Conversion Diagram

6.3.2 Shutdown Mode

The shutdown mode saves maximum power by shutting down all device circuitry other than the serial interface, and reduces current consumption to typically less than 0.3μA. Shutdown mode is enabled when the SD bit in the configuration register is set to 1; the device shuts down and terminates a conversion if it is ongoing.

6.3.3 One-Shot Mode

The GD30TS076C features a one-shot temperature measurement mode. When the device is in continuous conversion (SD = 0), writing a 1 to the OS bit enables One-shot mode, where any write to the one-shot register triggers a single temperature conversion. The device returns to the shutdown state at the completion of the single conversion, and a subsequent write to the one-shot register triggers another single conversion followed by a return to shutdown state. This mode reduces power consumption in the GD30TS076C when continuous temperature monitoring is not required.

When the device is in complete shutdown (SD = 1), the one-shot mode is not active regardless of the state of the OS bit, and a write to the one-shot register has no effect.

6.4 Over-Temperature Alarm

6.4.1 Comparator Mode

The GD30TS076C defaults to comparator mode. In this mode, the ALT pin becomes active when the temperature is equal to or exceeds the value in T_{HIGH} for a consecutive number of conversions as set by the FQ bits of the configuration register. ALT clears when the temperature falls below T_{LOW} for the same consecutive number of conversions. The difference between the two limits acts as a hysteresis on the comparator output, and a fault

counter prevents false ALTs as a result of environmental noise.

6.4.2 Interrupt Mode

In this mode, the ALT pin becomes active when the temperature equals or exceeds the value in T_{HIGH} for a consecutive number of fault conditions. The ALT pin remains active until a read operation of any register occurs. After the ALT pin is cleared, this pin becomes active again only when temperature falls below T_{LOW} for a consecutive number of fault conditions, and remains active until cleared by a read operation of any register. The cycle repeats with the ALT pin becoming active when the temperature equals or exceeds T_{HIGH} , and so on. The ALT pin is cleared also when the device is placed in shutdown mode. This action also clears the fault counter memory.

The operation of the ALT pin in the various modes is illustrated in Figure 2.

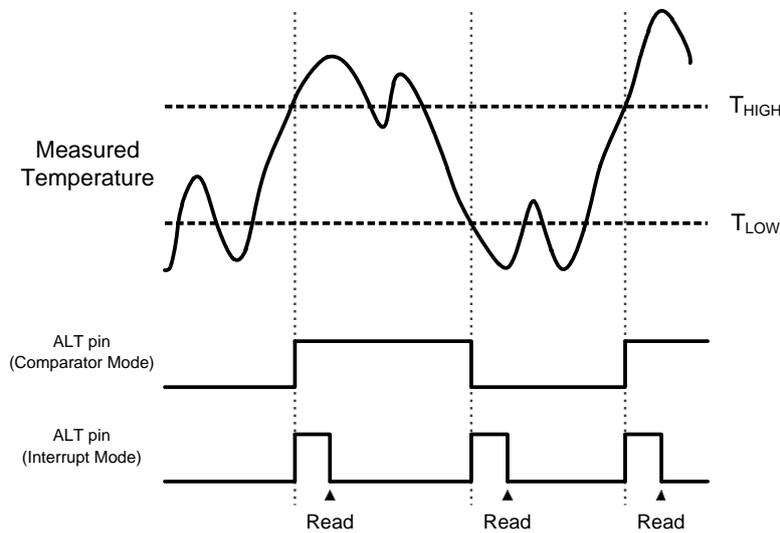


Figure 2. ALT Pin Modes of Operation

6.5 Serial Interface

6.5.1 Bus Overview

I2C/SMBus is a two-wire serial communication interface supporting multi-master and multi-slave. The device that initiates the communication is called the master, and the device controlled by the master is called the slave. The master is responsible for generating the serial clock (SCL) and controlling the bus access.

Data transfer is sent over eight clock pulses followed by an acknowledge bit. During data transfer, SDA must remain stable when SCL is high because any change in SDA while SCL is high is interpreted as a START or STOP conditions. Parameters for Figure 3 are defined in Table 8.

Table 8. Timing Diagram Requirements

SYMBOL	PARAMETER	FAST MODE		UNIT
		MIN	MAX	
f_{SCL}	SCL operating frequency	1	400	kHz
$t_{SU:STA}$	Repeated START condition setup time	0.6		us

SYMBOL	PARAMETER	FAST MODE		UNIT
		MIN	MAX	
$t_{HD:STA}$	Repeated START condition hold time	0.6		us
$t_{SU:STO}$	STOP condition setup time	0.6		us
t_{BUF}	Bus free time between STOP and START	1.3		us
$t_{SU:DAT}$	Data setup time	0.1		us
$t_{HD:DAT}$	Data hold time	0		us
t_{HIG}	SCL clock high period	0.6		us
t_{LOW}	SCL clock low period	1.3		us
t_R	Clock and data rise time		300	ns
t_F	Clock and data fall time		300	ns

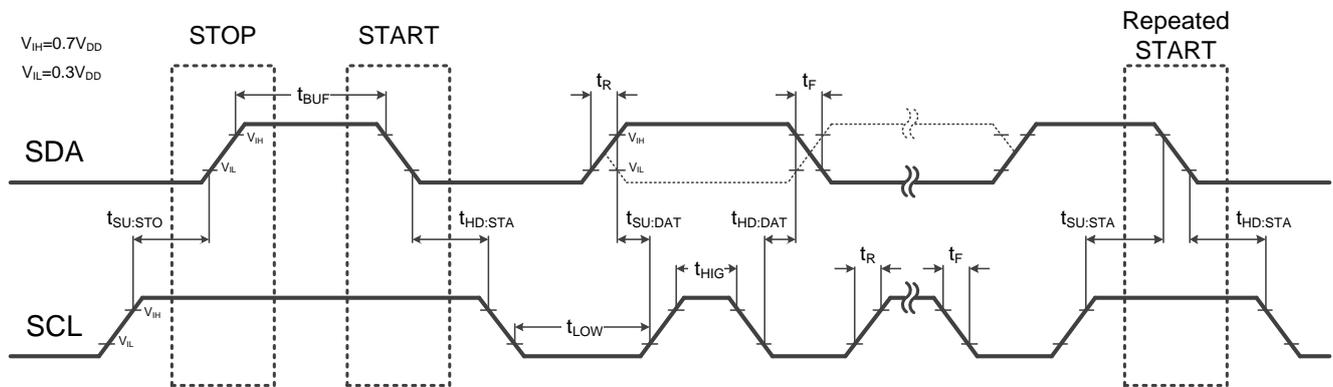


Figure 3. Two-Wire Timing Diagram

6.5.2 Serial Bus Address

The GD30TS076C features three address pins that allow up to eight devices to be addressed on a single bus. [Table 2](#) describes the pin logic levels and the corresponding address values. It is crucial for the logic level of the address pin to remain consistent throughout communication in order to avoid potential failures. The address pin must be connected either to VDD or GND and should not be left in a suspended state.

The slave address byte consists of seven address bits, and a direction bit indicating the intent of executing either a read or write operation. All data bytes are transmitted MSB first.

Table 9. Address Pin Connections and Slave Addresses

A2	A1	A0	DEVICE TWO-WIRE ADDRESS
GND	GND	GND	0x90 (write), 0x91 (read)
GND	GND	VDD	0x92 (write), 0x93 (read)
GND	VDD	GND	0x94 (write), 0x95 (read)
GND	VDD	VDD	0x96 (write), 0x97 (read)
VDD	GND	GND	0x98 (write), 0x99 (read)
VDD	GND	VDD	0x9A (write), 0x9B (read)
VDD	VDD	GND	0x9C (write), 0x9D (read)
VDD	VDD	VDD	0x9E (write), 0x9F (read)

6.5.3 Writing and Reading Operation

Accessing a particular register on the GD30TS076C is accomplished by writing the appropriate value to the pointer register. The value for the pointer register is the first byte transferred after the slave address byte with the R/W bit low. Every write operation to the GD30TS076C requires a value for the pointer register (see Figure 4).

When reading from the GD30TS076C, the last value stored in the pointer register by a write operation is used to determine which register is read by a read operation. To change the register pointer for a read operation, a new value must be written to the pointer register. This action is accomplished by issuing a slave address byte with the R/W bit low, followed by the pointer register byte. No additional data are required. The master can then generate a start condition and send the slave address byte with the R/W bit high to initiate the read command. See Figure 5 for details of this sequence. If repeated reads from the same register are desired, there is no need to continually send the pointer register bytes because the GD30TS076C stores the pointer register value until it is changed by the next write operation.

Note that register bytes are sent with the most significant byte first, followed by the least significant byte.

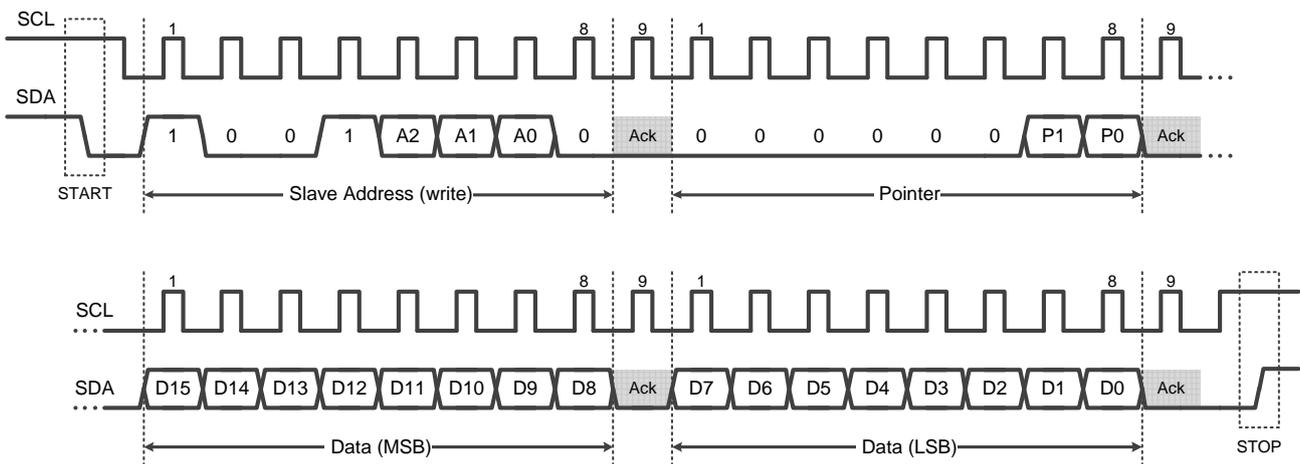


Figure 4. Two-wire Write Command Timing Diagram

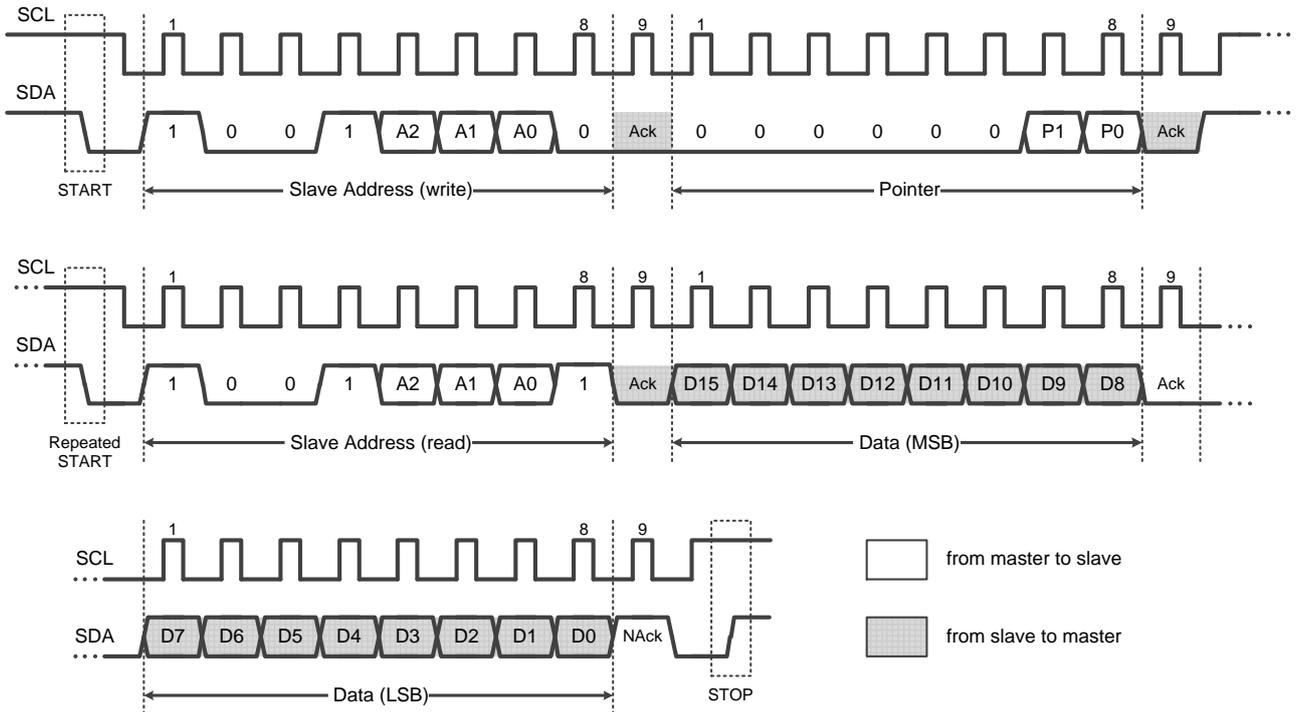


Figure 5. Two-wire Read Command Timing Diagram

6.5.4 Time-Out Function

The GD30TS076C resets the serial interface if SCL or SDA are held low for 20ms (typ) between a start and stop condition. If the GD30TS076C is pulled low, it releases the bus and then waits for a start condition. To avoid activating the timeout function, it is necessary to maintain a communication speed of at least 1kHz for the SCL operating frequency.

7 Application Information

The following contents are the precautions for GD30TS076C recommended by GigaDevice in practical applications. Customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

7.1 Remote Temperature Probe Selection

The GD30TS076C has an extremely low average power consumption, so an RC filter circuit can be added to the power supply pin to further reduce the impact of power supply noise. As shown in [Figure 6](#), the resistance must be less than $1\text{k}\Omega$, the capacitance must be greater than $0.1\mu\text{F}$, and the power supply voltage cannot be lower than 1.4V .

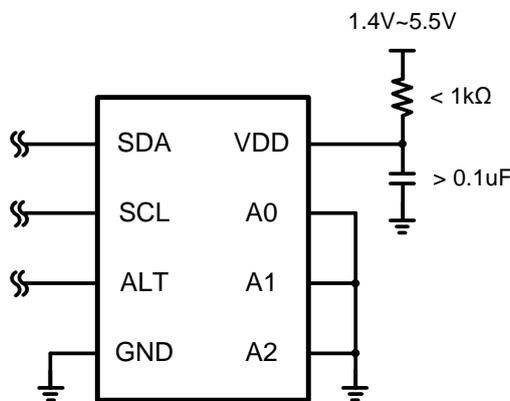


Figure 6. Typical Connections of the GD30TS076C




8 Layout Guidelines and Example

Place the device as far away as possible from noise sources such as high-speed digital buses, coil elements and wireless antennas. Place the power-supply bypass capacitor as close as possible to the supply and ground pins. The recommended value of this bypass capacitor is 0.1 μF . For severe noise environments, GD recommends the use of multiple different capacitance values in parallel, such as 1 μF +0.1 μF +0.01 μF , etc., so as to filter out digital noise in multiple frequency ranges.

Place the device in close proximity to the heat source that must be monitored, with a proper layout for good thermal coupling. This placement verifies that temperature changes are captured within the shortest possible time interval. The average power consumption is extremely low, and the self-heating effect is negligible.

9 Package Information


9.1 Outline Dimensions

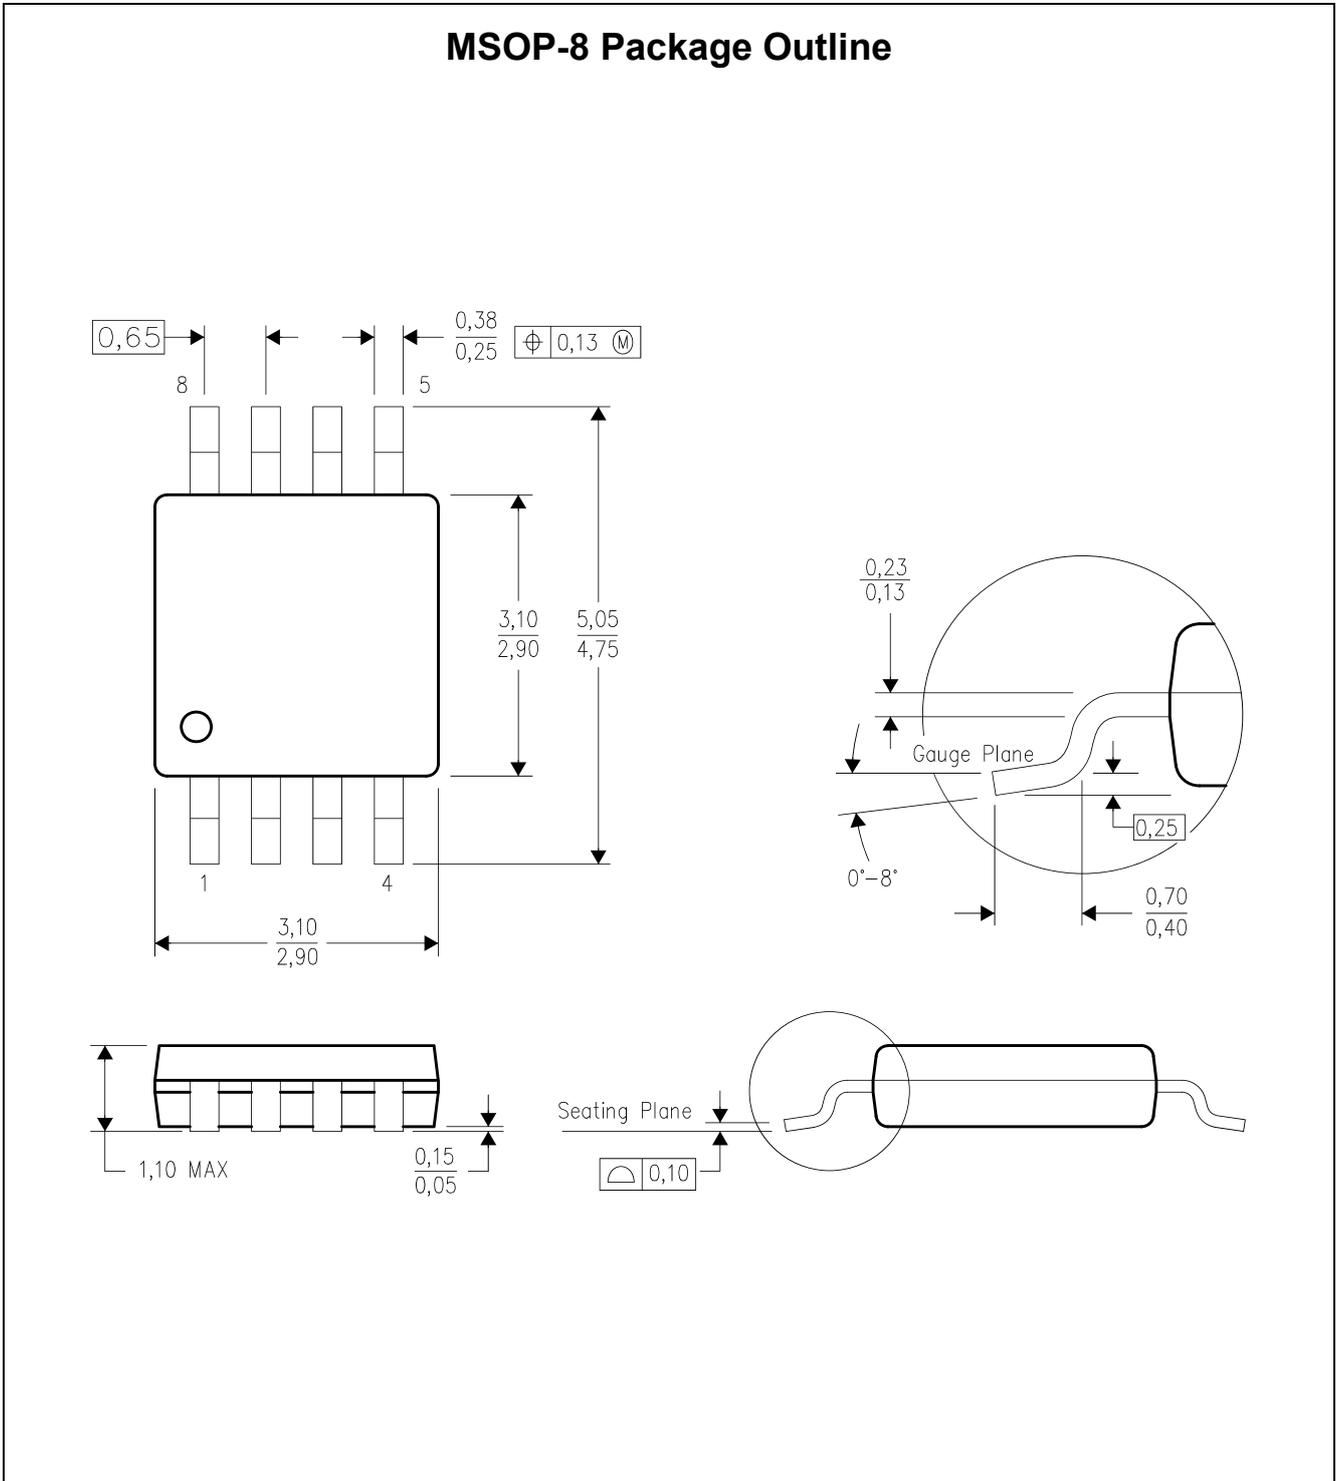

NOTES:

1. All dimensions are in millimeters.
2. Package dimensions does not include mold flash, protrusions, or gate burrs





SOP-8 Package Outline

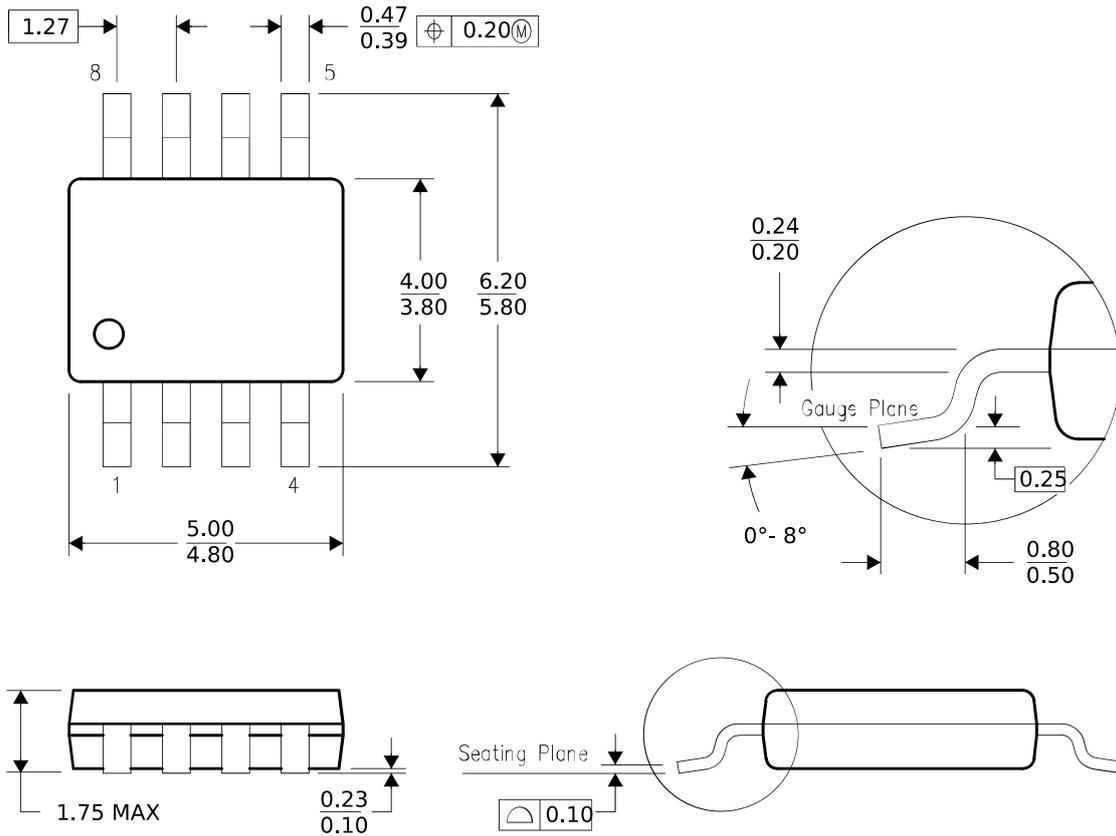

NOTES: (Continued)

1. All dimensions are in millimeters.

DFN-8 Package Outline

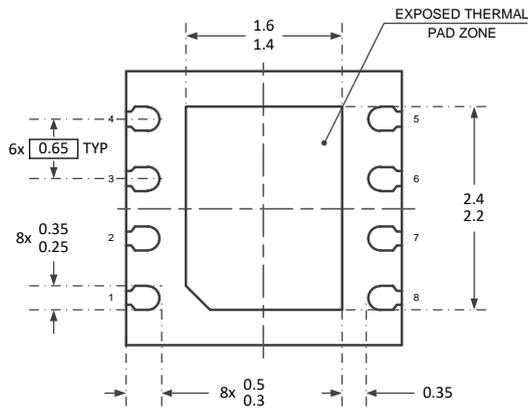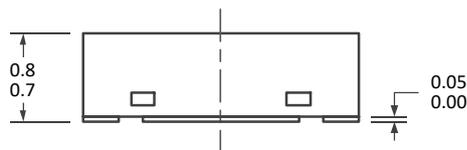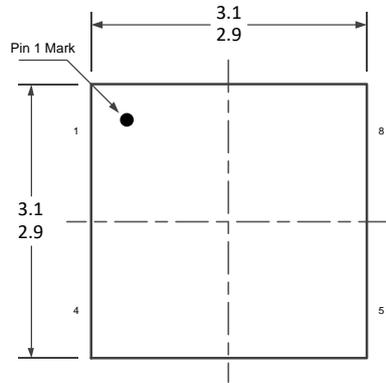

NOTES: (Continued)

1. All dimensions are in millimeters.



10 Ordering Information

Ordering Code	Package Type	ECO Plan	Packing Type	MOQ	OP Temp(°C)
GD30TS076CWGTR-I	SOP-8	Green	Tape & Reel	4000	-55°C to +125°C
GD30TS076CWMTR-I	MSOP-8	Green	Tape & Reel	4000	-55°C to +125°C
GD30TS076CWETR-I	DFN-8	Green	Tape & Reel	4000	-55°C to +125°C



11 Revision History

REVISION NUMBER	DESCRIPTION	DATE
1.0	Initial release and device details	2024

Important Notice

This document is the property of GigaDevice Semiconductor Inc. and its subsidiaries (the "Company"). This document, including any product of the Company described in this document (the "Product"), is owned by the Company according to the laws of the People's Republic of China and other applicable laws. The Company reserves all rights under such laws and no Intellectual Property Rights are transferred (either wholly or partially) or licensed by the Company (either expressly or impliedly) herein. The names and brands of third party referred thereto (if any) are the property of their respective owner and referred to for identification purposes only.

The Company makes no representations or warranties of any kind, express or implied, with regard to the merchantability and the fitness for a particular purpose of the Product, nor does the Company assume any liability arising out of the application or use of any Product described in this document. Any information provided in this document is provided only for reference purposes. It is the sole responsibility of the user of this document to determine whether the Product is suitable and fit for its applications and products planned, and properly design, program, and test the functionality and safety of its applications and products planned using the Product. Unless otherwise expressly specified in the datasheet of the Product, the Product is designed, developed, and/or manufactured for ordinary business, industrial, personal, and/or household applications only, and the Product is not designed or intended for use in (i) safety critical applications such as weapons systems, nuclear facilities, atomic energy controller, combustion controller, aeronautic or aerospace applications, traffic signal instruments, pollution control or hazardous substance management; (ii) life-support systems, other medical equipment or systems (including life support equipment and surgical implants); (iii) automotive applications or environments, including but not limited to applications for active and passive safety of automobiles (regardless of front market or aftermarket), for example, EPS, braking, ADAS (camera/fusion), EMS, TCU, BMS, BSG, TPMS, Airbag, Suspension, DMS, ICMS, Domain, ESC, DCDC, e-clutch, advanced-lighting, etc.. Automobile herein means a vehicle propelled by a self-contained motor, engine or the like, such as, without limitation, cars, trucks, motorcycles, electric cars, and other transportation devices; and/or (iv) other uses where the failure of the device or the Product can reasonably be expected to result in personal injury, death, or severe property or environmental damage (collectively "Unintended Uses"). Customers shall take any and all actions to ensure the Product meets the applicable laws and regulations. The Company is not liable for, in whole or in part, and customers shall hereby release the Company as well as its suppliers and/or distributors from, any claim, damage, or other liability arising from or related to all Unintended Uses of the Product. Customers shall indemnify and hold the Company, and its officers, employees, subsidiaries, affiliates as well as its suppliers and/or distributors harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of the Product.

Information in this document is provided solely in connection with the Product. The Company reserves the right to make changes, corrections, modifications or improvements to this document and the Product described herein at any time without notice. The Company shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them. Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2024 GigaDevice – All rights reserved